



**General Features**

|  |
|--|
| Description: urban and public lighting luminaire   |
| Insulation class: class II   |
| Rated voltage: 220-240 V 50/60 Hz  |
| Protection Grade: IP66   |
| Impact protection: IK08  |
| Surge protection device: integrated 10kV-10kA, Type 3, equipped with LED signaling and thermofusible for disconnection at the end of life; impulse withstand CL II 10kV DM |
| Power Factor: > 0.9  |
| Ambient temperature Ta: -30°C +50°C  |
| Weight: 11.00 kg   |
| Max exposed surface: 0,25 m <sup>2</sup>   |
| Lateral exposed surface: 0,14 m <sup>2</sup>   |
| Common mode surge protection: 10 kV  |
| Overvoltage protection differential mode: 10 kV  |
| Driver: included   |
| Marks and Certifications: ENEC / CE  |



**Performance Data\***

|                       |          |
|-----------------------|----------|
| LED Current:          | 525 mA   |
| Source flow:          | 6095 lm  |
| Source power:         | 35.5 W   |
| Source efficiency:    | 172 lm/W |
| Device flow:          | 5240 lm  |
| Device power:         | 39.5 W   |
| Appliance efficiency: | 133 lm/W |
| Glare Index Category: | D5       |

### Optical System

|   |
|---|
| Source: LED R2  |
| Color Temperature: 3000 K   |
| Color Rendering Index (CRI): $\geq 70$  |
| Chromatic consistency (SDCM): $\leq 4$  |
| Type of optics: LT-06 Asymmetric beam   |
| Optical group life: >130.000h @700mA @Ta25°C TM21 L80B20 >130.000h @700mA @Ta25°C TM21 L80B10 |
| Photobiological safety class: EXEMPT GROUP  |
| ULOR: 0%  |
| DLOR: 100%  |
| Light intensity category: G*6   |
| BUG rating: B1-U0-G1  |

### Normative References

EN60598-1 / EN60598-2-3 / EN62471

### Installation and maintenance

|   |
|---|
| Installation: side pole / arm / wall  |
| Pole diameter: Ø 48 - 60 - 76 - 114 mm (with accessories)   |
| Tilt: fastened or adjustable installation   |
| Fixing: 2 x AISI 304 stainless steel securing bolts   |
| Wiring: junction box IP68; the connection to the electrical backbone can be made without having to open the device. |
| Ø power cable: 10 ÷ 14 mm   |
| Cable Gland: PG16   |
| Replaceable wiring plate: removable plate   |
| Replaceable optical unit: each LED module is replaceable  |
| Screen opening: glass holder frame opening, fall block  |
| Disconnecter: automatic (with terminal section 2.5 mm <sup>2</sup> )  |

### Flow adjustment

On request

|                                 |   |
|---------------------------------|---|
| Virtual Midnight Teaching       | X |
| Constant flow output (CLO)      | X |
| Adjusting 1-10V                 | X |
| DALI control                    | X |
| Mains voltage variation         | X |
| Power line telemanagement (PLC) | X |
| Wireless remote management      | X |


### Materials

|   |
|---|
| Body: die-cast aluminium alloy UNI EN AB 47100 (copper content < 1%), upper dome with aluminium plate turning |
| Screen: tempered flat glass   |
| Lenses: high-transparency PMMA  |
| Fixing system: die-cast aluminium alloy UNI EN AB 47100 (copper content < 1%)                                 |
| Seals: expanded anti-age silicone foam  |
| Screws: stainless steel AISI 304  |
| Wiring plate: zinc-plated steel   |
| Finish: phospho-chromatation treated and polyester powder-coated in 16 phases to increase weather resistance  |

### Colors


|                  |                              |
|------------------|------------------------------|
| ■ Sablé 100 Noir | Code: <b>01BK3C45937CHM4</b> |
|------------------|------------------------------|

## Complements

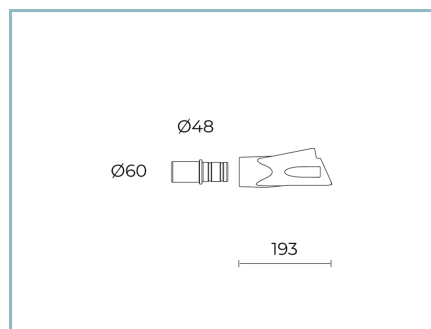


01AK901C0

L1 Fixed side kit  
for Ø 48-60 mm arm. Colour: Sablé 100  
Noir.

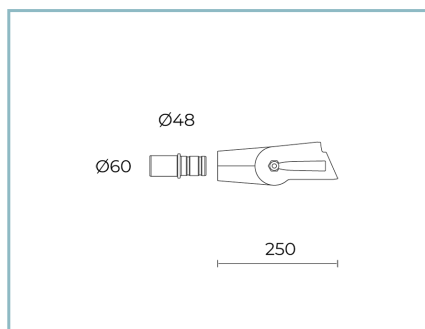

01AK902C0

L1 Adjustable side kit  
for Ø 48-60 mm pole or arm. Colour:  
Sablé 100 Noir.

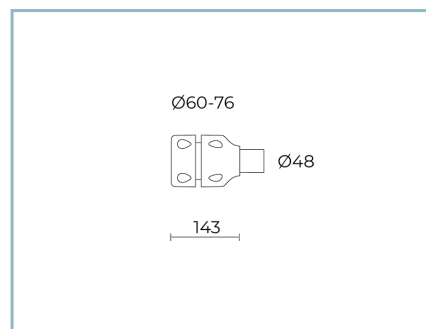


01AK903C0

L3 Joint kit  
for Ø 60-76 mm pole. Colour: Sablé 100  
Noir.




01AK904C0

L4 Double joint kit  
for Ø 60-76 mm pole. Colour: Sablé 100  
Noir.

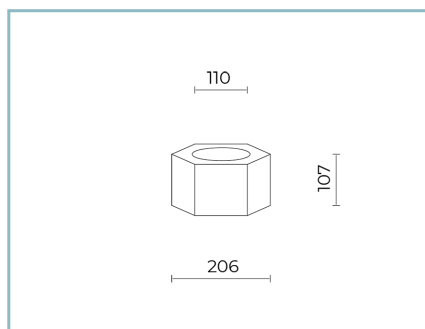


01SC904AD0

E1 Hexagonal connector kit  
1-2 180° couplings for a Ø 114 mm pole.  
Colour: Sablé 100 Noir.

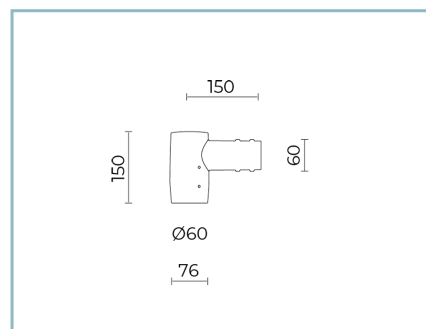


06AK905C0

B153 Post top joint  
Ø 60 mm (h. 90 mm). Colour: Sablé 100  
Noir.

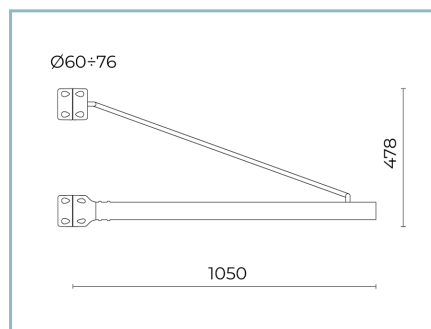


01AK923C0

B3 Single tubular arm  
Ø60 mm with tensioning rod for poles  
Ø 60-76 mm. L=1500 mm. Colour:  
Sablé 100 Noir.

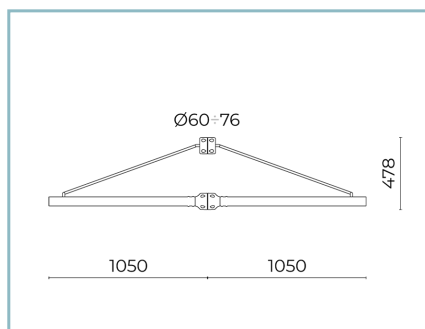

01AK924C0

B4 Double tubular arm  
Ø 60 mm with tensioning rod for  
poles Ø 60-76 mm poles. L=1500 mm.  
Colour: Sablé 100 Noir.

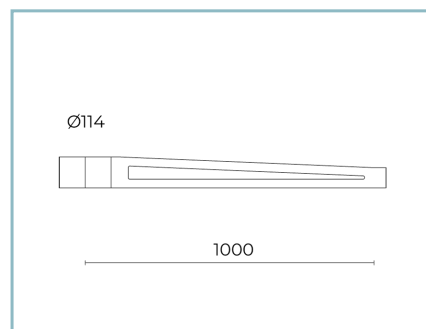

01AK931C0

B11 Machined single arm  
for poles Ø 114 mm. L=1000 mm.  
Colour: Sablé 100 Noir.

**Product Sheet**

Rev. 17/07/2024

**Big Link Pole Side**

Color Temperature: 3000 K

Type of optics: LT-06 Asymmetric beam

**01BK3C45937CHM4**

Colour: Sablé 100 Noir

**01AK921C0**

B1 Single tubular arm

Ø 60 mm for poles Ø 60-76 mm. L=550 mm. Colour: Sablé 100 Noir.

**06AK906C0**

B154 Single arm

for poles Ø 102 mm. L=245 mm. Colour: Sablé 100 Noir.

**06AK908C0**


B156 Double arm

for poles Ø 102 mm. L=245 mm. Colour: Sablé 100 Noir.

**06AK909C0**


B157 Double arm

for poles Ø 102 mm. L=550 mm. Colour: Sablé 100 Noir.

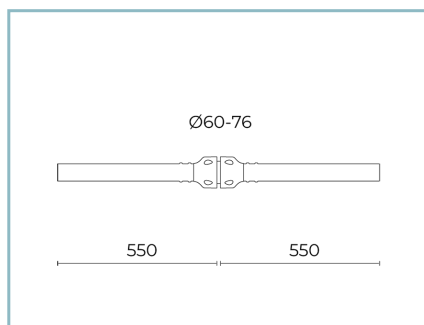**01AK922C0**

B2 Double tubular arm

Ø 60 mm for poles Ø 60-76 mm. L=550 mm. Colour: Sablé 100 Noir.

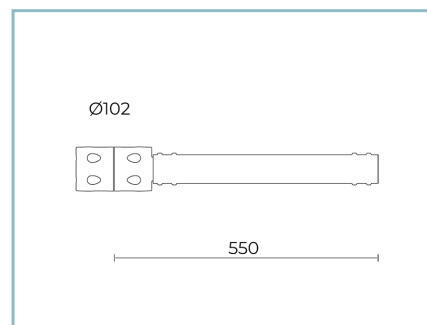**06AK907C0**

B155 Single arm

for poles Ø 102 mm. L=550 mm. Colour: Sablé 100 Noir.

**01AK951C0**

B1-P Tubular wall-mounted arm

Ø 60 mm. L=550 mm. Colour: Sablé 100 Noir.

---

**Product Sheet**

Rev. 17/07/2024

**Big Link Pole Side**

Color Temperature: 3000 K

Type of optics: LT-06 Asymmetric beam

**01BK3C45937CHM4**Colour: Sablé 100 Noir

---

---

**NOTES****\*Performance data**

The values indicated in this data sheet are nominal values with a tolerance of  $\pm 7\%$ .

Source flux and source efficiency data refer to the LED module without optics; in case you are interested in the performance of the LED module complete with optical system, you must multiply the data reported by the factor 0.9.

**General Data**

The characteristics of the product listed may be subject to change and must be confirmed when ordering.

In order to promote constant updating of its products, Cariboni Group reserves the right to make changes without prior notice.