



General Features

|                           |                           |
|---------------------------|---------------------------|
| Description:              | wall -mounted LED product |
| Insulation class:         | class II                  |
| Rated voltage:            | 220-240 V 50 Hz           |
| Protection Grade:         | IP66                      |
| Impact protection:        | IK08                      |
| Power Factor:             | > 0.9                     |
| Ambient temperature Ta:   | -30°C +50°C               |
| Weight:                   | 0.60 kg                   |
| Max exposed surface:      | 0,01 m <sup>2</sup>       |
| Lateral exposed surface:  | 0,005 m <sup>2</sup>      |
| Driver:                   | included                  |
| Marks and Certifications: | CE                        |



Performance Data\*

|                       |         |
|-----------------------|---------|
| Source flow:          | 350 lm  |
| Source power:         | 4 W     |
| Source efficiency:    | 88 lm/W |
| Device flow:          | 160 lm  |
| Device power:         | 4.7 W   |
| Appliance efficiency: | 34 lm/W |

**Product Sheet**

Rev. 17/01/2023

**Emi**

Options: ON-OFF  
Color Temperature: 4000 K  
Type of optics: blade 5°x180°

**06EM1A13058U**

Colour: Corten

**Optical System**

Source: LED

Color Temperature: 4000 K

Color Rendering Index (CRI):  $\geq 80$ Chromatic consistency (SDCM):  $\leq 3$ 

Type of optics: blade 5°x180°

Optical group life: &gt;100.000h @Ta25°C L80B10

Photobiological safety class: EXEMPT GROUP

**Normative References**

EN60598-1 / EN60598-2-5 / EN62471 / EN61547

**Installation and maintenance**

Installation: ceiling / wall

Tilt: inclination of up to 5° to compensate for any sloping installation surfaces

Wiring: pre-wiring with outgoing cable L=1,5 m.

Double access point for the power cable: bottom or side.

The side inlet is designed to allow the connection to visible electrical installations, typical of historic facades.

Ø power cable: 3 ÷ 7 mm

Cable Gland: M12x1,5

Replaceable wiring plate: removable by unlocking grub screws

**Materials**

Body: die-cast aluminium alloy UNI EN AB 47100 (copper content &lt; 1%)

Lenses: high-transparency PMMA

Seals: expanded anti-age silicone foam

Screws: stainless steel AISI 304 and AISI 316

Finish: phospho-chromatation treated and polyester powder-coated in 16 phases to increase weather resistance

**Colors** CortenCode: **06EM1A13058U**

---

**Product Sheet**

Rev. 17/01/2023

**Emi**


Options: ON-OFF  
Color Temperature: 4000 K  
Type of optics: blade 5°x180°

**06EM1A13058U**Colour: Corten

---

**Complements**

---

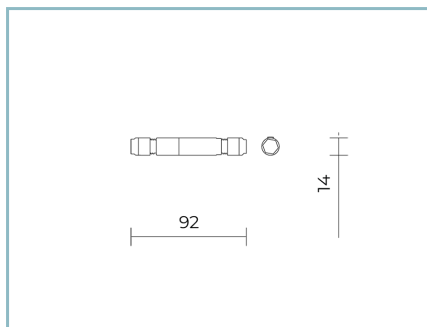

06GC902X0

B165 2-pole connector IP68

---

**NOTES****\*Performance data**

The values indicated in this data sheet are nominal values with a tolerance of +/-7%.

Source flux and source efficiency data refer to the LED module without optics; in case you are interested in the performance of the LED module complete with optical system, you must multiply the data reported by the factor 0.9.

**General Data**

The characteristics of the product listed may be subject to change and must be confirmed when ordering.

In order to promote constant updating of its products, Cariboni Group reserves the right to make changes without prior notice.