

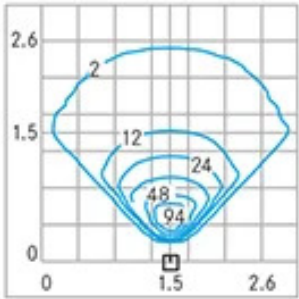


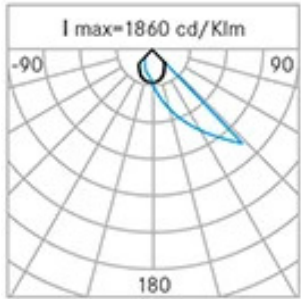

**General Features**

Description:	bollard
Insulation class:	class I
Rated voltage:	230 V 50 Hz
Protection Grade:	IP65
Impact protection:	IK08
Power Factor:	> 0.90
Ambient temperature Ta:	-30°C +50°C
Weight:	6.00 kg
Max exposed surface:	0,077 m²
Lateral exposed surface:	0,077 m²
Driver:	included
Marks and Certifications:	CE

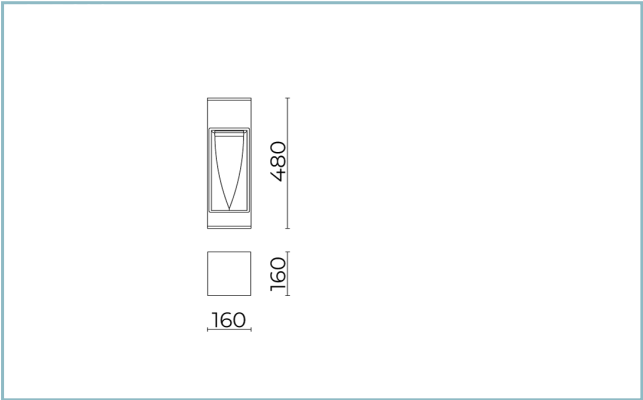

**Performance Data\***

LED Current:	500 mA
Source flow:	1805 lm
Source power:	14 W
Source efficiency:	129 lm/W
Device flow:	1300 lm
Device power:	16 W
Appliance efficiency:	81 lm/W

## Product Sheet

Rev. 23/07/2024

## Fin Bollard

Size:

Options: FIN 500

Color Temperature: 4000 K

Type of optics: AS-D Asymmetric diffused beam

**06FI2A9409C**

Colour: Sablé 100 Noir

### Optical System

Source: 9 LEDs

Color Temperature: 4000 K

Color Rendering Index (CRI):  $\geq 80$

Chromatic consistency (SDCM):  $\leq 3$

Type of optics: AS-D Asymmetric diffused beam

Optical group life: >60.000h @Ta25°C L80B10

### Normative References

EN60598-1 / EN60598-2-1 / EN62471

### Installation and maintenance

Installation: ground

Fixing: die-cast aluminium base plate for securing with anchoring bolts (anchoring bolt kit available as an accessory)

Ø power cable: 8 ÷ 12 mm

Cable gland: M20

### Materials

Body: Stem pole: extruded aluminium alloy UNI 9006/1 /

Supporting body: die-cast aluminium alloy UNI EN AB

47100 (copper content < 1%)

Diffuser: sandblasted flat glass

Seals: EPDM die cut / printed

Screws: stainless steel AISI 304

Finish: phospho-chromatation treated and polyester powder-coated in 16 phases to increase weather resistance

### Colors

■ Sablé 100 Noir

Code: **06FI2A9409C**

---

**Product Sheet**

Rev. 23/07/2024

**Fin Bollard**

Size:

Options: FIN 500

Color Temperature: 4000 K

Type of optics: AS-D Asymmetric diffused beam

---

**06FI2A9409C**

Colour: Sablé 100 Noir

---

**Complements**

---



06PY999X0

Anchoring bolts kit

L=200 mm.

---

**NOTES****\*Performance data**

The values indicated in this data sheet are nominal values with a tolerance of +/-7%.

Source flux and source efficiency data refer to the LED module without optics; in case you are interested in the performance of the LED module complete with optical system, you must multiply the data reported by the factor 0.9.

**General Data**

The characteristics of the product listed may be subject to change and must be confirmed when ordering.

In order to promote constant updating of its products, Cariboni Group reserves the right to make changes without prior notice.