






General Features

| | |
|---------------------------|----------------------|
| Description: | Recessed LED product |
| Insulation class: | class II |
| Rated voltage: | 230 V 50 Hz |
| Protection Grade: | IP65 |
| Impact protection: | IK06 |
| Power Factor: | > 0.90 |
| Ambient temperature Ta: | -30°C +50°C |
| Weight: | 0.30 kg |
| Max exposed surface: | 0,06 m² |
| Lateral exposed surface: | 0,005 m² |
| Driver: | included |
| Marks and Certifications: | CE |

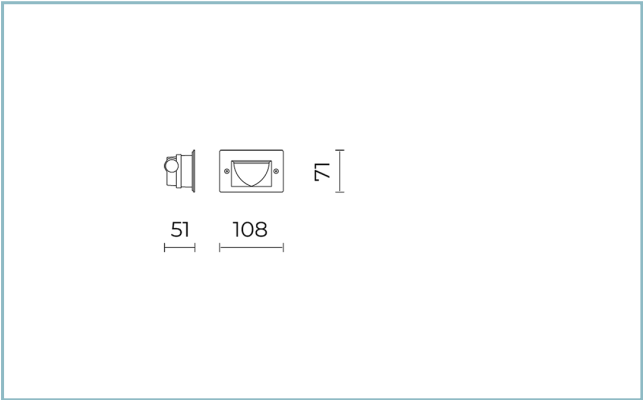

Performance Data*

| | |
|-----------------------|---------|
| Source flow: | 300 lm |
| Source power: | 4 W |
| Source efficiency: | 75 lm/W |
| Device flow: | 95 lm |
| Device power: | 4.5 W |
| Appliance efficiency: | 21 lm/W |

Optical System

Source: LED

Color Temperature: 4000 K

Color Rendering Index (CRI): ≥ 80

Chromatic consistency (SDCM): ≤ 3

Type of optics: AS-D Asymmetric diffused beam

Optical group life: $>35.000\text{h}$ @Ta25°C L80B10

Normative References

EN60598-1 / EN60598-2-2 / EN62471

Installation and maintenance

Installation: recessed

Fixing: Wall-recessed housing: polymer printed provided with the product

Ø power cable: 8 ÷ 12 mm

Cable gland: M20

Materials

Body: die-cast aluminium alloy UNI EN AB 47100 (copper content $< 1\%$)

Diffuser: sandblasted flat glass

Seals: EPDM die cut / printed

Screws: stainless steel AISI 304

Finish: phospho-chromatation treated and polyester powder-coated in 16 phases to increase weather resistance

Colors

■ Grey RAL9006

Code: **06FX1B2307A**

Product Sheet

Rev. 23/07/2024

Fin xs Wall-Recessed

Options: FIN XS-horizontal

Color Temperature: 4000 K

Type of optics: AS-D Asymmetric diffused beam

06FX1B2307AColour: Grey RAL9006

NOTES***Performance data**

The values indicated in this data sheet are nominal values with a tolerance of $\pm 7\%$.

Source flux and source efficiency data refer to the LED module without optics; in case you are interested in the performance of the LED module complete with optical system, you must multiply the data reported by the factor 0.9.

General Data

The characteristics of the product listed may be subject to change and must be confirmed when ordering.

In order to promote constant updating of its products, Cariboni Group reserves the right to make changes without prior notice.