
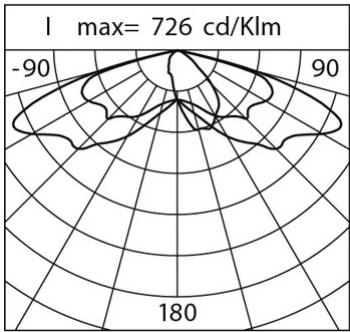
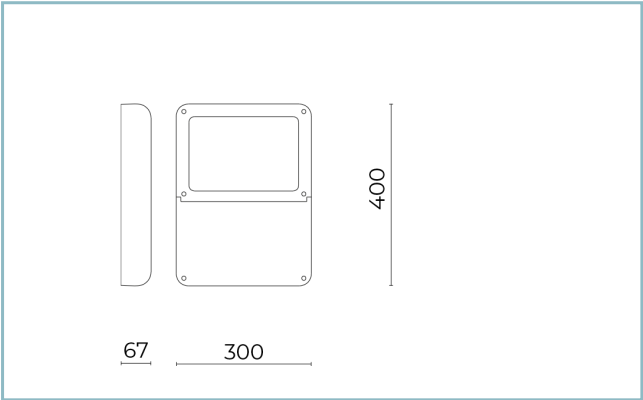


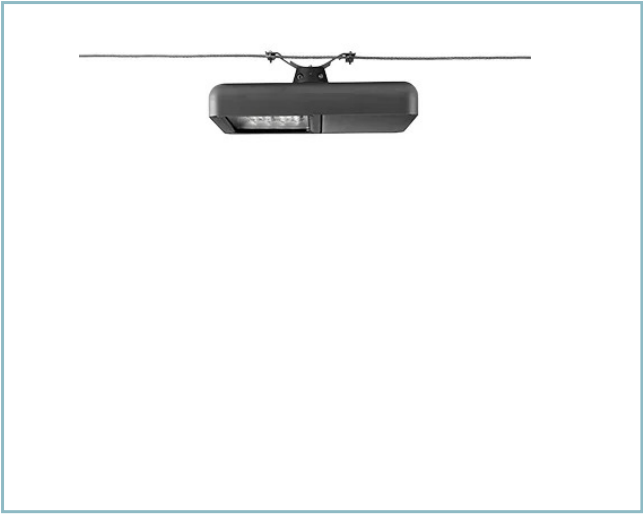

### General Features

|                                           |                                                 |
|-------------------------------------------|-------------------------------------------------|
| Description:                              | LED fitting for lighting paths and urban spaces |
| Insulation class:                         | class II                                        |
| Rated voltage:                            | 220-240 V 50/60 Hz                              |
| Protection Grade:                         | IP66                                            |
| Impact protection:                        | IK09                                            |
| Surge protection device:                  | integrated 10kV-10kA                            |
| Power Factor:                             | > 0.95                                          |
| Ambient temperature Ta:                   | -30°C +50°C                                     |
| Weight:                                   | 6 kg                                            |
| Max exposed surface:                      | 0.119 m <sup>2</sup>                            |
| Lateral exposed surface:                  | 0.026 m <sup>2</sup>                            |
| Common mode surge protection:             | 10 kV                                           |
| Overvoltage protection differential mode: | 10 kV                                           |
| Driver:                                   | included                                        |
| Driver lifetime:                          | F10 >100.000h @Ta25°C                           |
| Marks and Certifications:                 | ENEC / ENEC+ / CE                               |

| Performance Data*     | ST-02_1800K | ST-02_2200K | ST-02_2700K | ST-02_3000K | ST-02_4000K |
|-----------------------|-------------|-------------|-------------|-------------|-------------|
| LED Current:          | 530 mA      | 530 mA      | 530 mA      | 530 mA      | 530 mA      |
| Source flux:          | 3210 lm     | 3775 lm     | 4080 lm     | 4150 lm     | 4420 lm     |
| Source power:         | 25.5 W      | 25.5 W      | 25.5 W      | 25.5 W      | 25.5 W      |
| Source efficiency:    | 126 lm/W    | 148 lm/W    | 160 lm/W    | 163 lm/W    | 173 lm/W    |
| Device flux:          | 2695 lm     | 3170 lm     | 3425 lm     | 3485 lm     | 3710 lm     |
| Device power:         | 29.5 W      | 29.5 W      | 29.5 W      | 29.5 W      | 29.5 W      |
| Appliance efficiency: | 91 lm/W     | 107 lm/W    | 116 lm/W    | 118 lm/W    | 126 lm/W    |
| Glare Index Category: | D5          | D4          | D4          | D4          | D4          |

### Optical System

|                                                |
|------------------------------------------------|
| Source: LED R1                                 |
| Color Temperature: ECL 1800K - 4000 K          |
| Color Rendering Index (CRI): $\geq 70$         |
| Chromatic consistency (SDCM): $\leq 3$         |
| Type of optics: ST-02 Narrow street ECL        |
| Optical group life: >100.000h @ Ta 25°C L90B10 |
| Photobiological safety class: EXEMPT GROUP     |
| ULOR: 0%                                       |
| DLOR: 100%                                     |
| Light intensity category: G*3                  |

### Normative References

EN60598-1, EN60598-2-3, EN61547; EN62471, EN55015,  
EN61000-3-2, EN61000-3-3

### Installation and maintenance

|                                                                                                                                                                                                                |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Installation: pole side, wall-mounted, post top                                                                                                                                                                |
| Pole diameter: Ø 60 - 76 - 102 mm                                                                                                                                                                              |
| Tilt: (wall-mounted) fixed or adjustable installation; (pole side) with adjustable joint can be tilted from -70° to +90° and rotated by 0° / 180°. The pointing and locking system is continuously adjustable. |
| Ø power cable: 10 ÷ 14 mm                                                                                                                                                                                      |
| Cable Gland: PG16                                                                                                                                                                                              |
| Power supply compartment: independent from the optical group                                                                                                                                                   |

### Flow adjustment

On request

|                                           |   |
|-------------------------------------------|---|
| Virtual Midnight Teaching                 | X |
| Arrangement for Zhaga connector (Book 18) | X |
| Constant flow output (CLO)                | X |
| Adjusting 1-10V                           | X |
| DALI control                              | X |
| Mains voltage variation                   | X |
| Wireless remote management                | X |
| Provision for motion/light sensors        | X |


### Materials

|                                                                                                              |
|--------------------------------------------------------------------------------------------------------------|
| Body: die-cast aluminium alloy UNI EN AB 47100 (copper content < 1%)                                         |
| Screen: tempered flat glass 4 mm                                                                             |
| Lenses: high-transparency PMMA                                                                               |
| Fixing system: die-cast aluminium alloy UNI EN AB 47100 (copper content < 1%)                                |
| Seals: anti-age silicone                                                                                     |
| Screws: stainless steel AISI 304                                                                             |
| Finish: phospho-chromatation treated and polyester powder-coated in 16 phases to increase weather resistance |

### Colors

|                  |                               |
|------------------|-------------------------------|
| ■ Sablé 100 Noir | Code: <b>06LN2B253414CDYN</b> |
|------------------|-------------------------------|

## Complements

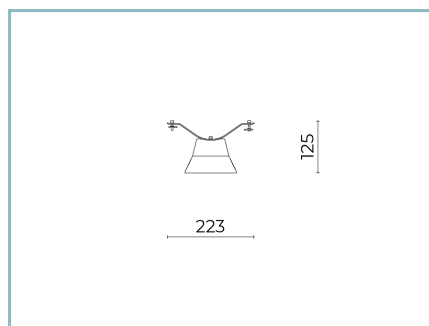

06LN909C0

B233 Suspension kit for Ø 6-12 mm string.

Colour: Sablé 100 Noir.

## NOTES

### \*Performance data

The values indicated in this data sheet are nominal values with a tolerance of +/-7%.

Source flux and source efficiency data refer to the LED module without optics; in case you are interested in the performance of the LED module complete with optical system, you must multiply the data reported by the factor 0.9.

### General Data

The characteristics of the product listed may be subject to change and must be confirmed when ordering.

In order to promote constant updating of its products, Cariboni Group reserves the right to make changes without prior notice.