




General Features

| | |
|---------------------------|--------------------|
| Description: | LED floodlight |
| Insulation class: | class II |
| Rated voltage: | 220-240 V 50/60 Hz |
| Protection Grade: | IP66 |
| Impact protection: | IK07 |
| Power Factor: | > 0.9 |
| Ambient temperature Ta: | -30°C +50°C |
| Weight: | 1.00 kg |
| Max exposed surface: | 0,011 m² |
| Lateral exposed surface: | 0,006 m² |
| Driver: | included |
| Marks and Certifications: | CE |



| H (m) | Ø (m) | Em (lux) |
|-------|-------------|----------|
| 1 | 0.12x1.84 | 325 |
| 2 | 0.22 x 3.66 | 81 |
| 3 | 0.34 x 5.5 | 36 |
| 4 | 0.44 x 7.32 | 20 |
| 5 | 0.56 x 9.16 | 13 |

Performance Data*

| | |
|-----------------------|---------|
| Source flow: | 320 lm |
| Source power: | 4.2 W |
| Source efficiency: | 76 lm/W |
| Device flow: | 80 lm |
| Device power: | 4.8 W |
| Appliance efficiency: | 17 lm/W |

Optical System

Source: LED

Color Temperature: 3000 K

Color Rendering Index (CRI): ≥ 80

Chromatic consistency (SDCM): ≤ 3

Type of optics: Blade 6°x90°

Optical group life: >100.000h @Ta25°C L80B10

Photobiological safety class: EXEMPT GROUP

Normative References

EN60598-1 / EN60598-2-5 / EN62471 / EN61547

Installation and maintenance

Installation: ceiling / wall / ground

Tilt: tilting of the body (+90° -45°) and a rotation of the optical unit by 355° for the orientation of the light blade

Fixing: fixing base made of die-cast aluminium alloy UNI EN AB 47100 (copper content < 1%), which can be rotated of 360°

Wiring: pre-wired product, cable L=1,5m

Cable Gland: M12x1,5

Materials

Body: die-cast aluminium alloy UNI EN AB 47100 (copper content < 1%)

Screen: tempered flat glass

Lenses: high-transparency PMMA

Fixing system: base die-cast aluminium alloy UNI EN AB 47100 (copper content < 1%)

Seals: expanded anti-age silicone foam

Screws: stainless steel AISI 304

Finish: phospho-chromatation treated and polyester powder-coated in 16 phases to increase weather resistance

Colors

■ Sablé 100 Noir

Code: **06OM4A139C5C**

Product Sheet

Rev. 17/01/2023

Omikron mini Flood

Options: ON-OFF

Color Temperature: 3000 K

Type of optics: Blade 6°x90°

06OM4A139C5C


Colour: Sablé 100 Noir

Complements



06GC902X0

B165 2-pole connector IP68

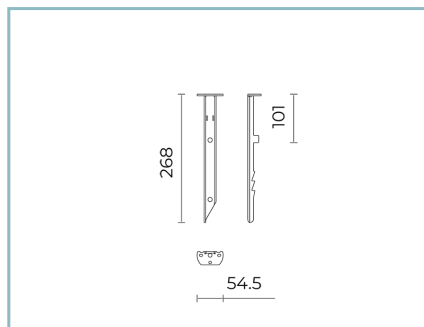

06AK957B0

I2 Spike for ground installation.

Colour: black RAL9005

NOTES

*Performance data

The values indicated in this data sheet are nominal values with a tolerance of +/-7%.

Source flux and source efficiency data refer to the LED module without optics; in case you are interested in the performance of the LED module complete with optical system, you must multiply the data reported by the factor 0.9.

General Data

The characteristics of the product listed may be subject to change and must be confirmed when ordering.

In order to promote constant updating of its products, Cariboni Group reserves the right to make changes without prior notice.