



**General Features**

Description: LED fitting for lighting façades, paths and urban spaces

Insulation class: class II

Rated voltage: 220-240 V 50/60 Hz

Protection Grade: IP66

Impact protection: IK09

Power Factor: > 0.9

Ambient temperature Ta: -25° C + 50° C

Weight: 11 kg

Max exposed surface: 0.212 m<sup>2</sup>

Lateral exposed surface: 0.086 m<sup>2</sup>



Common mode surge protection: 10 kV

Overvoltage protection differential mode: 10 kV

Driver: included

Driver lifetime: > 100.000 h @Ta 25° C

Marks and Certifications: CE / ENEC pending

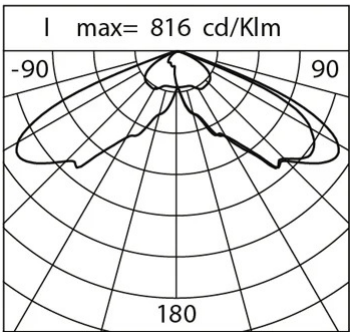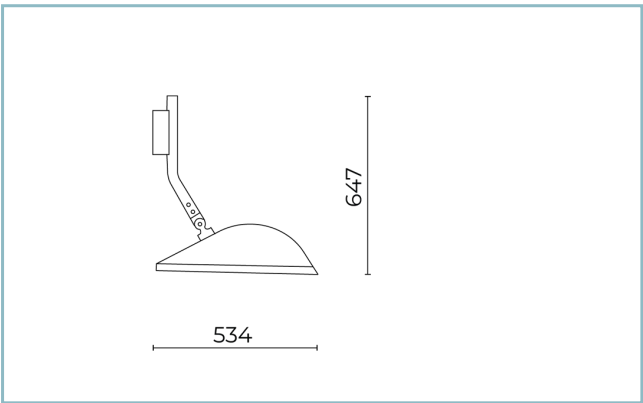

| Performance Data*     | LT-63_1800K | LT-63_2200K | LT-63_2700K | LT-63_3000K | LT-63_4000K |
|-----------------------|-------------|-------------|-------------|-------------|-------------|
| LED Current:          | 800 mA      | 800 mA      | 800 mA      | 800 mA      | 800 mA      |
| Source flux:          | 7575 lm     | 8915 lm     | 9625 lm     | 9800 lm     | 10425 lm    |
| Source power:         | 57.5 W      | 57.5 W      | 57.5 W      | 57.5 W      | 57.5 W      |
| Source efficiency:    | 132 lm/W    | 155 lm/W    | 167 lm/W    | 170 lm/W    | 181 lm/W    |
| Device flux:          | 6360 lm     | 7485 lm     | 8085 lm     | 8230 lm     | 8755 lm     |
| Device power:         | 64.5 W      | 64.5 W      | 64.5 W      | 64.5 W      | 64.5 W      |
| Appliance efficiency: | 99 lm/W     | 116 lm/W    | 125 lm/W    | 128 lm/W    | 136 lm/W    |
| Glare Index Category: | D5          | D4          | D4          | D4          | D4          |

**Optical System**

|                                                               |
|---------------------------------------------------------------|
| Source: LED R3                                                |
| Color Temperature: ECL 1800K - 4000 K                         |
| Color Rendering Index (CRI): $\geq 80$                        |
| Chromatic consistency (SDCM): $\leq 3$                        |
| Type of optics: LT-63 Asymmetric beam ECL                     |
| Optical group life: > 100.000 h @ 720mA @Ta 25° C TM21 L90B10 |
| Photobiological safety class: EXEMPT GROUP                    |
| ULOR: 0%                                                      |
| DLOR: 100%                                                    |
| Light intensity category: G*6                                 |

**Normative References**

|                                                             |
|-------------------------------------------------------------|
| EN60598-1 / EN60598-2-3 / IEC / TR62778 / EN62471 / EN61547 |
|-------------------------------------------------------------|

**Installation and maintenance**

|                                                              |
|--------------------------------------------------------------|
| Installation: wall                                           |
| Tilt: 0° ÷ -90°                                              |
| Ø power cable: 6 ÷ 11 mm                                     |
| Cable Gland: PG13,5                                          |
| Power supply compartment: independent from the optical group |

**Flow adjustment**

|              |          |            |
|--------------|----------|------------|
|              | Standard | On request |
| DALI control | X        |            |

**Materials**

|                                                                                                              |
|--------------------------------------------------------------------------------------------------------------|
| Body: die-cast aluminium alloy UNI EN AB 47100 (copper content < 1%)                                         |
| Screen: tempered flat glass                                                                                  |
| Lenses: high-transparency PMMA                                                                               |
| Fixing system: die-cast aluminium alloy UNI EN AB 47100 (copper content < 1%)                                |
| Seals: anti-age silicone foam                                                                                |
| Screws: stainless steel AISI 304                                                                             |
| Wiring plate: zinc-plated steel                                                                              |
| Finish: phospho-chromatation treated and polyester powder-coated in 16 phases to increase weather resistance |

**Colors**

|                                                                                             |                                    |
|---------------------------------------------------------------------------------------------|------------------------------------|
|  Champagne | Code:<br><b>06SP1CD680415G6DYN</b> |
|---------------------------------------------------------------------------------------------|------------------------------------|

---

**Product Sheet**

Rev 16/07/2024

**Spoon Applique**

Size: x-large

Color Temperature: ECL 1800K - 4000 K

Type of optics: LT-63 Asymmetric beam ECL

**06SP1CD680415G6DYN**Colour: Champagne

---

---

**NOTES****\*Performance data**

The values indicated in this data sheet are nominal values with a tolerance of +/-7%.

Source flux and source efficiency data refer to the LED module without optics; in case you are interested in the performance of the LED module complete with optical system, you must multiply the data reported by the factor 0.9.

**General Data**

The characteristics of the product listed may be subject to change and must be confirmed when ordering.

In order to promote constant updating of its products, Cariboni Group reserves the right to make changes without prior notice.