





General Features

Description:	Recessed product
Insulation class:	class III
Rated voltage:	500 mA
Protection Grade:	IP66
Impact protection:	IK08
Power Factor:	> 0.9
Ambient temperature Ta:	-30°C +50°C
Weight:	1.00 kg
Driver:	remote (to be ordered separately)
Marks and Certifications:	CE

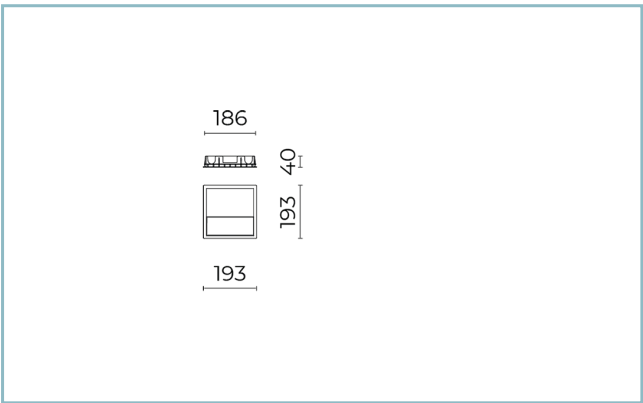

Performance Data*

LED Current:	500 mA
Source flow:	815 lm
Source power:	6.5 W
Source efficiency:	125 lm/W
Device flow:	250 lm
Device power:	7.5 W
Appliance efficiency:	33 lm/W
Glare Index Category:	D6

Product Sheet

Rev. 17/01/2023

Aplos Wall-Recessed

Options: DALI

Color Temperature: 2700 K

Type of optics: asymmetrical wide beam

06AP1A84847DV

Colour: White RAL9003

Optical System

Source: 8 LEDs

Color Temperature: 2700 K

Color Rendering Index (CRI): ≥ 80 Chromatic consistency (SDCM): ≤ 3

Type of optics: asymmetrical wide beam

Optical group life: >60.000h @Ta25°C L80B10

Photobiological safety class: EXEMPT GROUP

Normative References

EN60598-1 / EN60598-2-3 / EN62471 / EN61547

Installation and maintenance

Installation: wall recessed

Wiring: rear cable entry, pre-wiring with outgoing cable

Flow adjustment

Standard

DALI control

X

Materials

Body: die-cast aluminium alloy UNI EN AB 47100 (copper content < 1%)

Screen: polycarbonate

Optical Collimator: nylon PA66

Finish: phospho-chromatation treated and polyester powder-coated in 16 phases to increase weather resistance

Colors White RAL9003Code: **06AP1A84847DV**

Product Sheet

Rev. 17/01/2023

Aplos Wall-Recessed


Options: DALI

Color Temperature: 2700 K

Type of optics: asymmetrical wide beam


06AP1A84847DV

Colour: White RAL9003

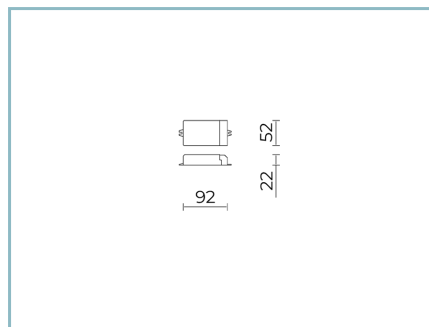Complements

06LX900X0

B176 DALI driver 16W IP20

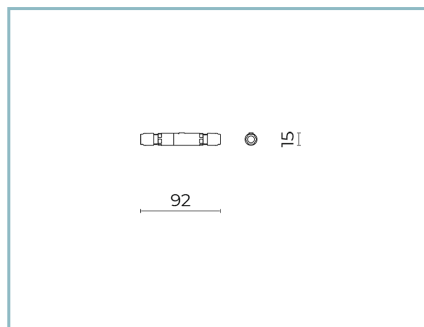

06AP901X0

M1 CONNECTOR

IP68 2P CL.III - DALI

NOTES***Performance data**

The values indicated in this data sheet are nominal values with a tolerance of +/-7%.

Source flux and source efficiency data refer to the LED module without optics; in case you are interested in the performance of the LED module complete with optical system, you must multiply the data reported by the factor 0.9.

General Data

The characteristics of the product listed may be subject to change and must be confirmed when ordering.

In order to promote constant updating of its products, Cariboni Group reserves the right to make changes without prior notice.