




**General Features**

Description: LED fitting for lighting paths and urban spaces
Insulation class: class II
Rated voltage: 220-240 V 50/60 Hz
Protection Grade: IP66
Impact protection: IK09
Power Factor: > 0.9
Ambient temperature Ta: -25°C +50°C
Driver: included
Marks and Certifications: CE / ENEC

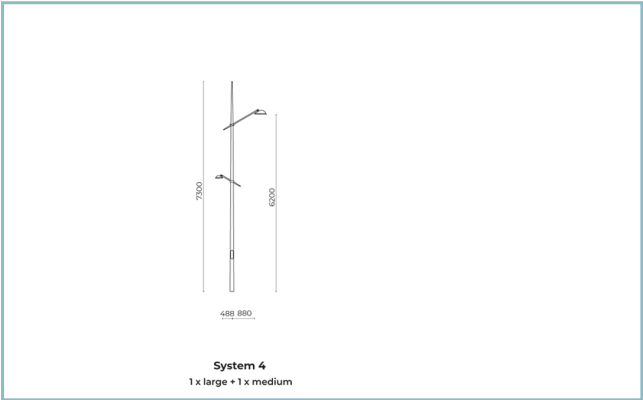

**Performance Data\***

**Product Sheet**

Rev 16/07/2024

**Spoon System**

Size: 1 Spoon Medium + 1 Spoon Large

Options: System 4 STREET OPTICS

Color Temperature: 3000 K

Type of optics: Street optics

**06SP0D90001C9G6HL**

Colour: Champagne

**Optical System**

Source: LED

Color Temperature: 3000 K

Color Rendering Index (CRI):  $\geq 80$ Chromatic consistency (SDCM):  $\leq 3$ 

Type of optics: Street optics

Photobiological safety class: EXEMPT GROUP

ULOR: 0%

DLOR: 100%

**Normative References**

EN60598-1 / EN60598-2-3 / IEC / TR62778 / EN62471 /

EN61547

**Installation and maintenance**

Installation: pole

Tilt: 0° +90°

Ø power cable: 6 ÷ 11 mm

Cable Gland: PG13,5

Power supply compartment: independent from the optical group

**Flow adjustment**

Standard On request

Virtual Midnight Teaching

X

Arrangement for Zhaga connector  
(Book 18)

X

DALI control

X

**Materials**

Body: die-cast aluminium alloy UNI EN AB 47100 (copper content &lt; 1%)

Screen: tempered flat glass

Lenses: high-transparency PMMA

Fixing system: die-cast aluminium alloy UNI EN AB 47100 (copper content &lt; 1%)

Seals: anti-age silicone foam

Screws: stainless steel AISI 304

Wiring plate: zinc-plated steel

Finish: phospho-chromatation treated and polyester powder-coated in 16 phases to increase weather resistance

**Colors** ChampagneCode: **06SP0D90001C9G6HL**

---

**Product Sheet**

Rev 16/07/2024

**Spoon System**

Size: 1 Spoon Medium + 1 Spoon Large

Options: System 4 STREET OPTICS

Color Temperature: 3000 K

Type of optics: Street optics

---

**06SP0D90001C9G6HL**Colour: Champagne

---

---

**NOTES****\*Performance data**

The values indicated in this data sheet are nominal values with a tolerance of +/-7%.

Source flux and source efficiency data refer to the LED module without optics; in case you are interested in the performance of the LED module complete with optical system, you must multiply the data reported by the factor 0.9.

**General Data**

The characteristics of the product listed may be subject to change and must be confirmed when ordering.

In order to promote constant updating of its products, Cariboni Group reserves the right to make changes without prior notice.